

## Thermoelectric cooling unit TG 6205305



### Product Features

<b>Brand Name:</b>	SoliTherm Peltier
<b>Order Number:</b>	6205305
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>IP class EN 60529:</b>	IP 66 NEMA 4X
<b>Optional:</b>	Stainless Steel 316 with Chromated heatsinks, P/N: 62053054
<b>Approvals:</b>	CE, RoHS
<b>Accessories:</b>	<a href="#">Peltier Condensate Kit</a>
<b>Taric Code:</b>	84158300

## Technical data TG 6205305

<b>Cooling capacity L35L35:</b>	200 W
<b>Temperature range:</b>	-20°C - +65°C
<b>Air volume flow:</b>	Ambient air circuit: 106 m <sup>3</sup> /h Cabinet air circuit: 150 m <sup>3</sup> /h
<b>Mounting:</b>	External (with frame)
<b>Dimension HxWxD:</b>	500 x 330 x 207 mm
<b>Weight:</b>	21 kg
<b>Voltage / Frequency:</b>	120 - 230 V ~ 50/60 Hz
<b>Current L35L35:</b>	2.2 A @ 120 V 1.1 A @ 230 V
<b>Starting current:</b>	3.8 A @ 120 V 2 A @ 230 V
<b>Nominal power L35L35:</b>	250 W
<b>Max. power:</b>	460 W
<b>Fuse:</b>	6 A (T) @ 120 V 4 A (T) @ 230 V
<b>Connection:</b>	8-Pole Connector


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview product group Cabinet cooling units - Peltier](#)


**Performance Graph:**

T = Ambient temperature  
P = Cooling capacity

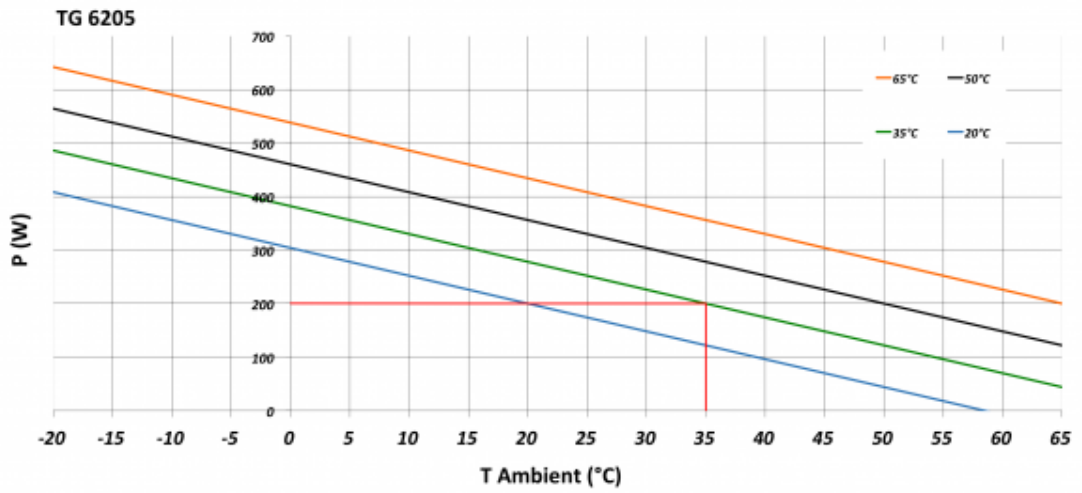

[click image to enlarge](#)

**Cut out dimensions:**

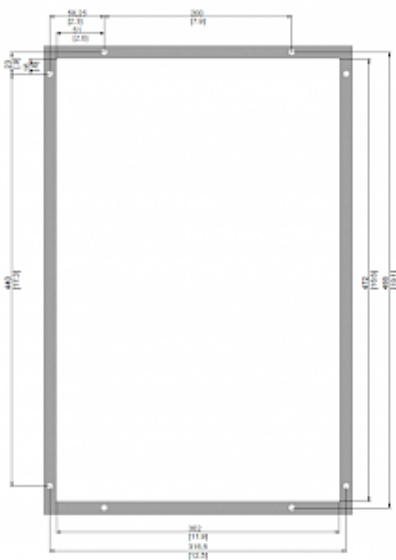

[click image to enlarge](#)